

# RK-OSF Over Sized Flange



Fits WOODFORD Models 14, 16, 17, 19 & 101 Wall Faucets

*For more information contact...*

## WOODFORD MANUFACTURING COMPANY

2121 Waynoka Road, Colorado Springs, Colorado 80915 • Phone: (800) 621-6032 • Fax: (800) 765-4115

To view our complete product line visit: [www.woodfordmfg.com](http://www.woodfordmfg.com) or email: [sales@woodfordmfg.com](mailto:sales@woodfordmfg.com)


*A Division of WCM Industries, Inc.*

## Hole in the wall?

Whether updating an old faucet with a new Woodford freezeless faucet or improving an existing installation, the new RK-OSF Over Sized Flange can cover a larger hole due to previous installation plus secure the faucet to a solid surface.

The RK-OSF can be attached to any new or existing Woodford Model 14, 16, 17, 19 & 101 wall flange.

Outer holes are spaced a full 3 1/2" apart for better mounting screw contact in masonry or siding.

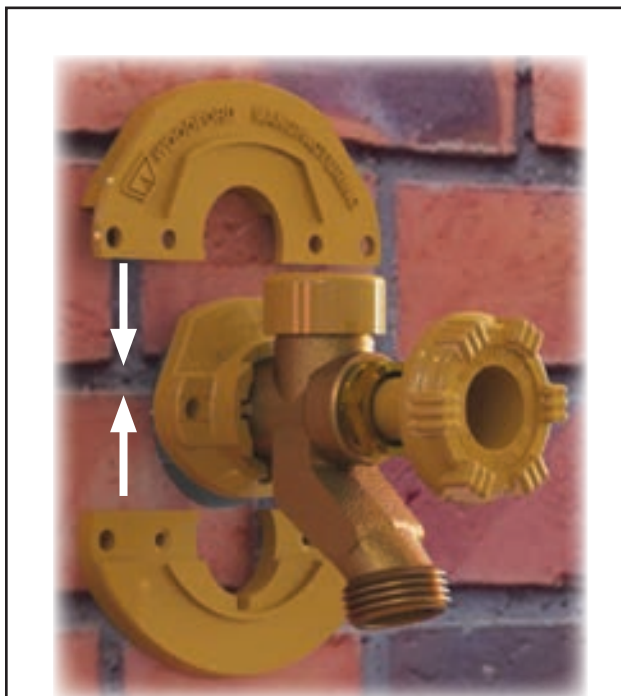

OSF Parts:

1. 30091 Over Sized Flange - Top
2. 30092 Over Sized Flange - Bottom
3. 30234 Mounting Screws (2)

### If New Installation

1. Join the (2) RK-OSF halves around the faucet tube and behind the existing faucet flange.
2. Fasten flanges together using (2) included screws.
3. Position the faucet through the wall and secure with proper type and length screws.

### If Repair Installation

1. Remove any screws from the existing faucet flange.
2. Be sure the wall flange can be pulled 3/8" away from the wall.
3. Slip the Top and Bottom OSF halves behind the existing faucet flange.
4. Align the 2 inner OSF holes with the existing faucet flange holes and secure with (2) included screws.
5. Install (2) screws through the outer OSF holes to secure faucet onto wall.

**RK-OSF List Price.....\$2.55**